

Highway & Airport
Paving Equipment

Concrete Batching
& Mixing Plants


Canal Construction
Equipment

Trenching
Equipment



Telescopic End Sections

Change Paving Kit Widths in a Matter of Hours

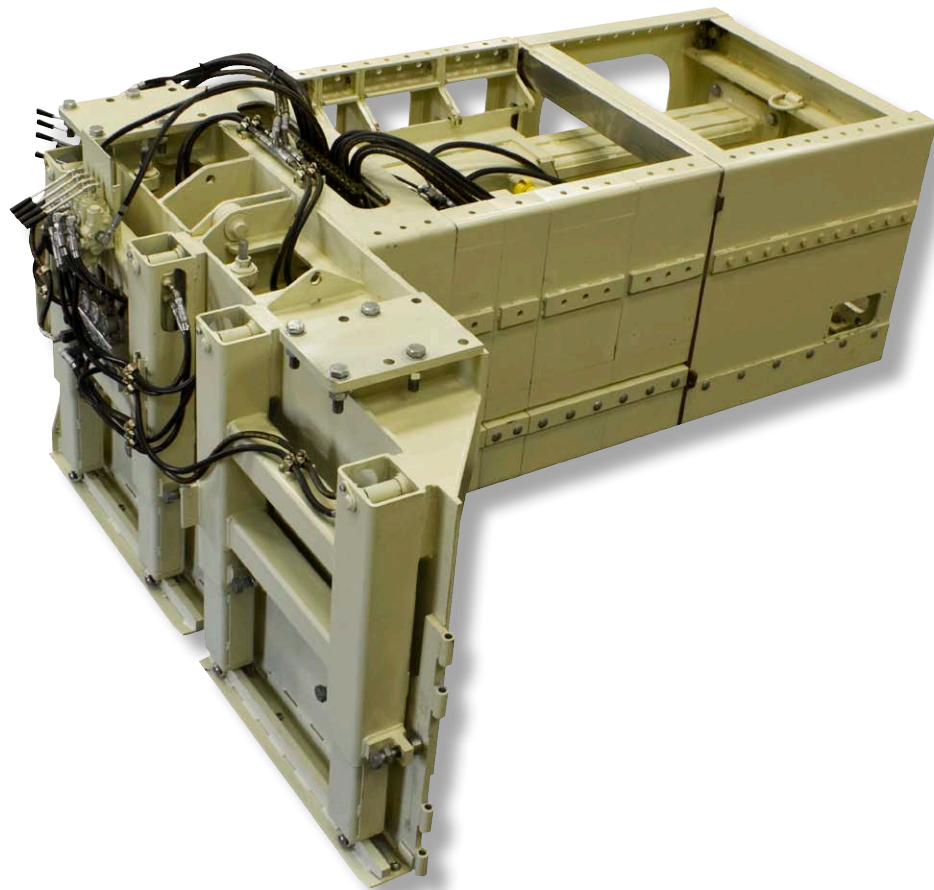


Today's competitive market requires contractors to have the ability to change widths rapidly to meet ever tightening production schedules without sacrificing pavement smoothness. G&Z's New **Telescopic Paving Kit End Sections** allow the contractor to perform paving kit width changes rapidly without removing bolts or use of cranes and with just a one or two person crew. Each Telescopic End Section gives the contractor 3 feet (915mm) (or 6 ft. [1.83m]

for both sides) of quick width change capability with G&Z Slipform Pavers. A width change which could typically take a four person crew no less than 6 to 10 hours can now be performed by one or two people in two hours or less. The new end sections can be specified as an option during the purchase of a new G&Z Slipform Paver or can be retrofitted to any existing G&Z Slipform Paver.

“We could not have met the current schedule with any other piece of equipment than the S850 with the Telescopic End Sections.”

-Ron Mockelman
Hawkins Construction Co.
Epley Airfield Project-2009

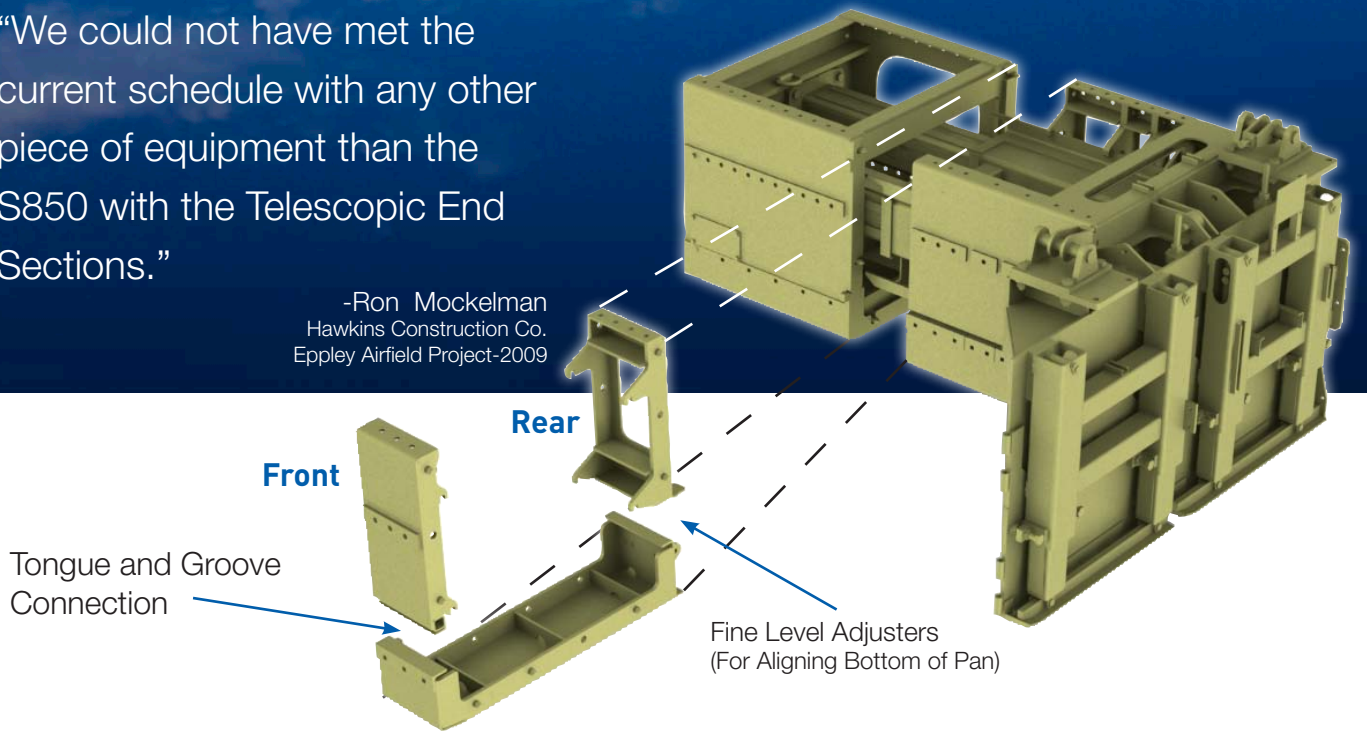

Each Telescopic End Section on the paving kit is 5 ft (1.52 m) wide when fully retracted and has 3 ft (0.91 m) of hydraulic telescopic ability. The Add-in Paving Kit Spacer Sections are made up of three components:

- Front spacer
- Rear spacer
- Bottom pan section

The pans have a “tongue and groove” connection to engage the front spacer and fine level adjusters to attach the rear spacer. There are line up dowels on the spacers and pans to guide the sections together meaning there are no bolts to fix the sections as they are held together by hydraulic clamping forces.

If productivity is your focus, consider an investment in a new G&Z Concrete Slipform Paver with Telescopic End Sections for more paving time and less downtime.

Each Telescopic End Section Kit Includes:

- 2 ft (0.60 m) wide terminal section with edge overbuild device along with a 3 ft. (915mm) paving kit section. The 2 ft. wide terminal section’s pan can be replaced with various curb and gutter molds in the future.
- An assortment of 3 to 4 add-in spacer/pan sections of widths that match your needs totalling up to 3 ft. (915mm)
- Fine width adjustment shim pack

Option: New G&Z Walk Box allows one mechanic to operate the tractor and perform a width change from ground level

Benefits:

- Up to 6 ft. (1.8 m) width change capability in just a few hours
- Width changes that require fewer personnel
- Rapid width change without sacrificing smoothness
- More square yards (meters) completed per day or week with a single paver

**USA and International
Patents Pending**

Guntert & Zimmerman Const. Div., Inc.

222 E. Fourth St. Ripon, CA 95366 U.S.A.

Phone 209-599-0066 Fax 209-599-2021

Toll Free 800-733-2912

Email: gz@guntert.com Web: www.guntert.com

